

# DINMTPX-EH


FLUSH MOUNT RFID READER

## FEATURES

- Reading type: EM4002/4100 compatible & HID (125kHz) compatible
- Operating frequency: 125 kHz
- Read range: Up to 7 cm
- Buzzer ON/OFF
- Reader Data Output: Wiegand 26, 34, 37, 42, 24, 32, 35, 40 bits
- Tamper protection: When opened or dismantled
- Operating Voltage: 9 to 14V DC
- Current consumption: Max. 45 mA
- Operating Temperatures: -20 to +50 C non condensing
- Protection standard: IP40




## MOUNTING

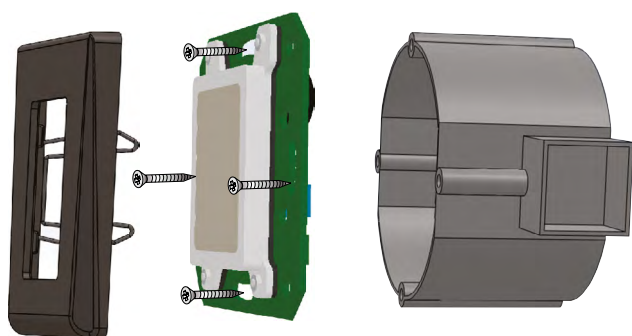


Idle Mode

Access Denied

Access Granted

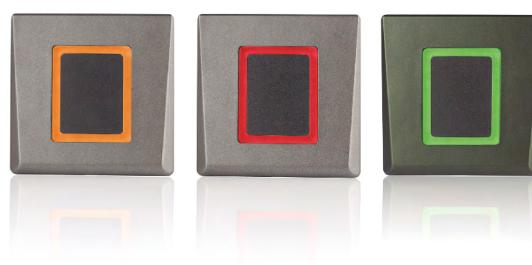


## DIMENSIONS

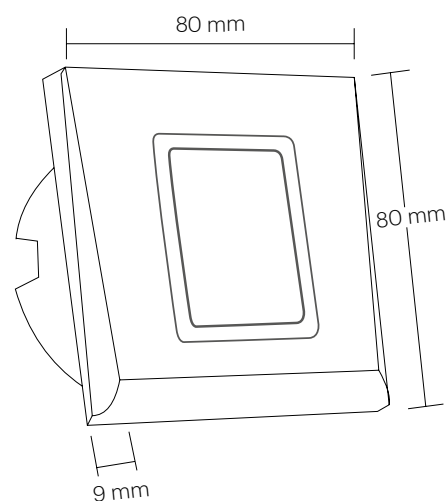

## COLOURS



DINMTPXS-EH  
Silver



DINMTPXC-EH  
Charcoal



DINMTPXW-EH  
White