


APPLICATION NOTE

ONLine Access

How to integrate ANPR license plate camera in PROS CS


A023

CONNECTION

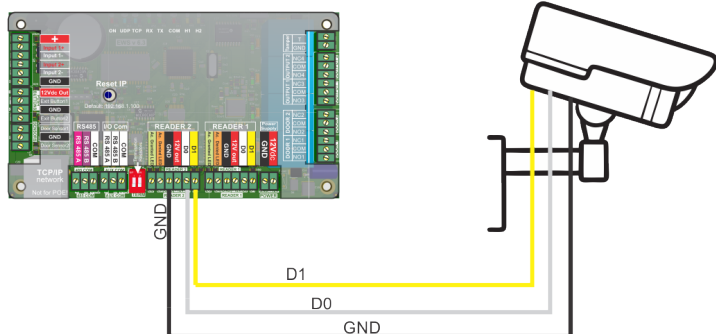

Connect the Wiegand output of the ANPR camera to the EWSi controller by connecting the wires D1, D0 and GND. The ground is necessary to be connected, since the camera is using different power supply.

CONNECTION

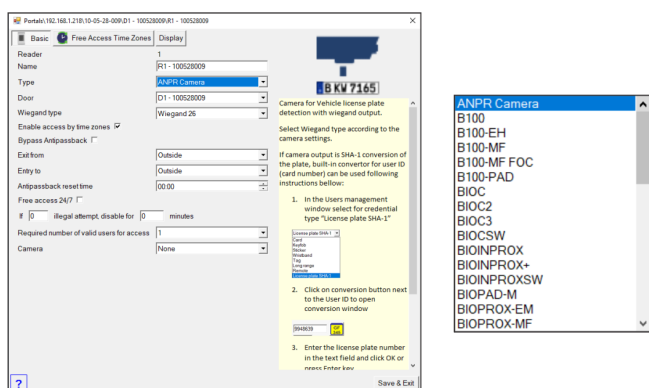

1. In Reader right click/Properties, for Reader Type select ANPR Camera.

2. Go to Users and make New User.

3. For Type select License Plate SHA-1.

4. Click on the yellow icon next to the User ID field.



5. New window will appear where you need to put your license plate with all the characters. The license plate number will be automatically converted into User ID (Wiegand Number).

6. Click OK and the converted ID will be entered in the User ID field.

7. Click Save and the User is set to go.

