
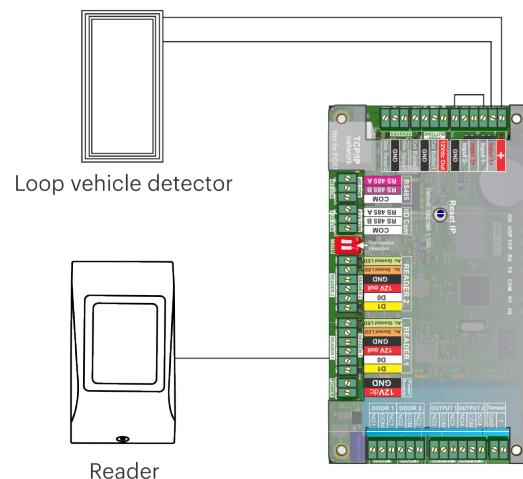


APPLICATION NOTE

ONLine Access

Parking application in web access system

A051

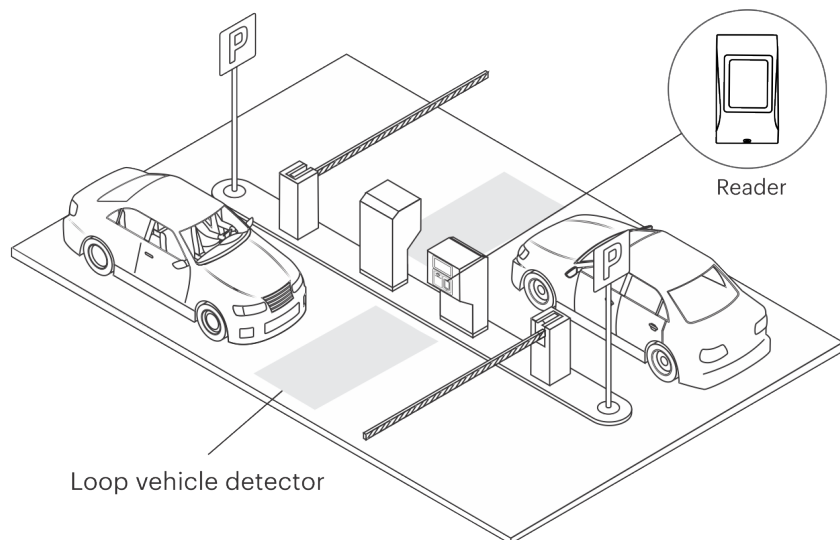

- Connect the vehicle detector in the Free Input of EWS controller.
- In Door/properties/ Aux tab, set the door to be disabled by input.
- In Free Input/Properties, make sure the input is enabled and select the proper type of the Input - Normally open or Normally closed.
- Additionally, the barrier can be set to work in "Anti-pass back mode" if required.
- Additionally you can set counter on how many cars can be limited inside the parking. Refer to app note A050, here: <https://www.xprgroup.com/wp-content/uploads/2020/07/A050-Counter-using-MT-LCD.pdf>

