







### FEATURES -

- Input Voltage: 12-24 VDC; 15-24 VAC;

- Current consumption: 60 mA at 12 VDC; 30 mA at 24 VDC - Output: 1 relay (0.5A/125 VAC; 1A/30 VDC)

Latch or Pulse mode

(01 to 250 seconds)

Read Range: up to 8cmUsers: 4000Exit Button Input: Yes

- Programming cards: 1 Master Card and 1 Delete Card

- Visible LED Signal: 3 LEDs

- Audible Signal: One internal Buzzer- Operating Temperature: -20°C to 50°C

- Protection Standard: IP66- Resin potted electronics: Yes

- Dipswitch: For enrollment of Master and Delete Card


- Tamper switch: For higher security- Dimension (mm): 90L x 51W x 17H


- Cable length: 50 cm

## **ENROL A USER**

INPUT	INDICATION
1. Present Master Card	short + long beep
2. Present Shadow Card	short + 3 short beeps
3. Present <b>User Card</b> (or multiple User Cards)	OK beep
4. Present Master Card	short + 5 short beeps

### **DIMENSIONS** —

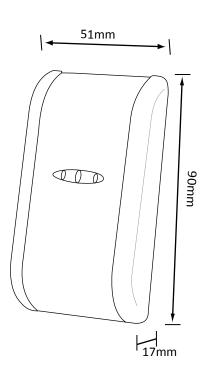

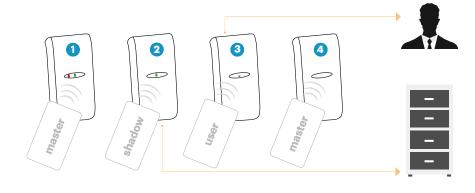

# **ACCESSORIES**

#### Fobs & Cards

